
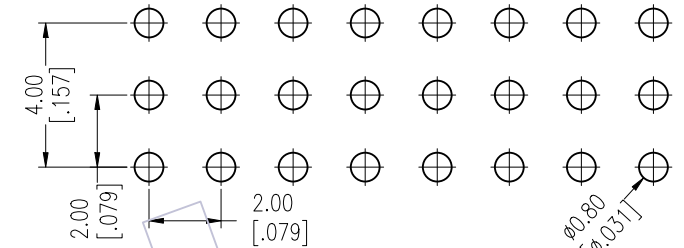


HSF

NOTES:
 Rated Current:2.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40℃ to +105℃

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)


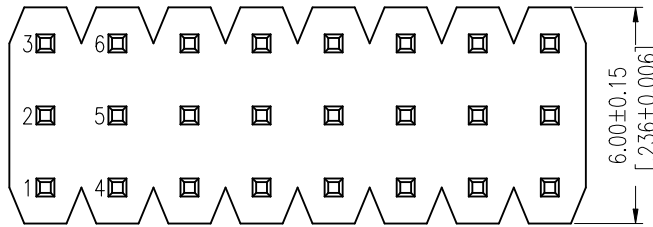


Ordering Information

1215-23 XX XX S XXX C 0 XX

A2 **A1** **A0**

No.of Pins	Contact Plating	Pin Length	Insulator	Packing	Series No.
Per Row:03~40	G0=Gold Flash	L=A+B+C	Material	0=PE Bag	01~99
	G3=10u"Gold	Standard:	C=PA9T	T=Tube	
	G4=15u"Gold				
	G5=30u"Gold				
	S0=Gold Flash/Tin				
	S3=10u"Gold/Tin				
	S4=15u"Gold/Tin				
	S5=30u"Gold/Tin				
	SN=Tin				
	SM=Matte Tin				

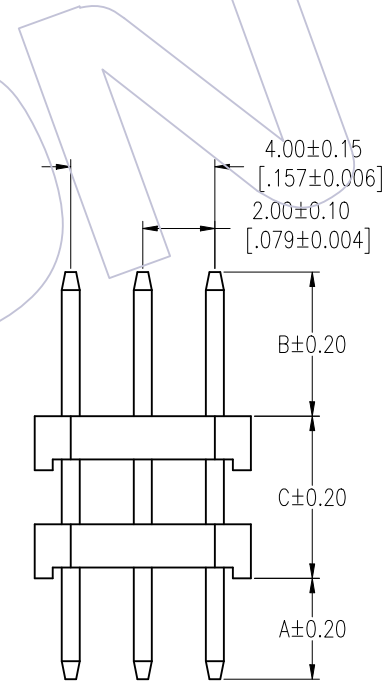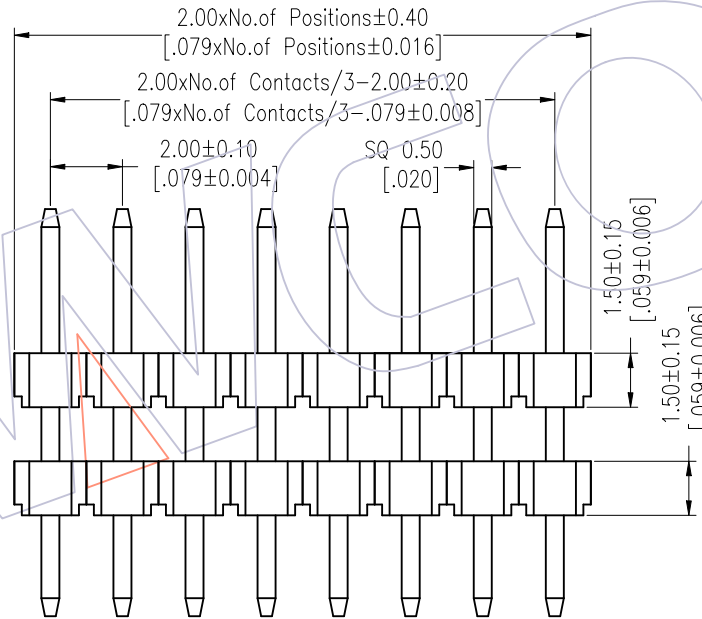

TYPE 1

TYPE 2

Item	Pin Length	A	B	C	Mating
Standard	---	2.80	4.00	---	2263
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2020/06/12	Modify Pin 03~40P	A2	Du Ying	X.X ±0.40	2020/06/12	UNIT	mm	1215-23XXXXXXCXXX
A1	2018/01/18	Modify P/N	A1	Liu	X.XX ±0.25	DATE	SIZE	A4	TITLE: PH2.00 THREE ROW
A0	2012/04/18	NEW	A0	---	X.XXX ±0.15	DATE	SHEET	1/1	DOUBLE PLASTIC 180° H=1.5
					Angle ± 3°	DATE	PROJ.		Customer NO.
					DIM TOL				

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: salesks@wcon.com