
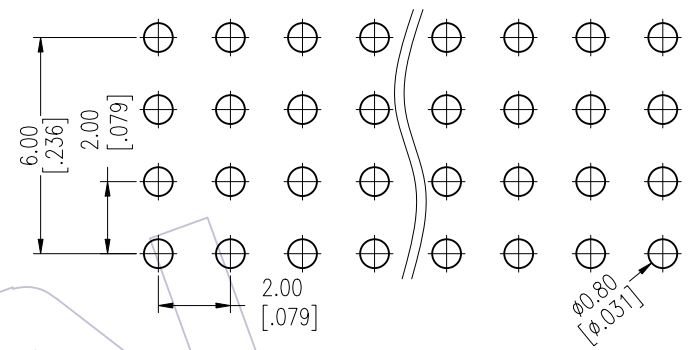


# HSF

Recommended P.C.B Layout (Top Side)  
(PCB BOARD TOLERANCE ±0.05)

NOTES:  
 Rated Current: 2.0AMP.  
 Contact Resistance: 20mΩ Max.  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min.  
 Operation Temperature: -40°C to +105°C



Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: PA9T+33%G.F UL94V-0 BK

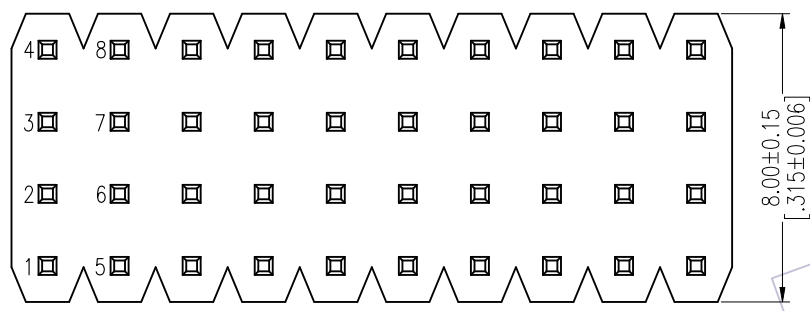

## Ordering Information

1220-14 XX XX S XXX X 0 XX

No. of Pins Per Row: 04-40	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	Pin Length L=A+B+2.0 Standard: 088=8.8	Insulator Material C=PA9T	Packing 0=PE Bag T=Tube	Series No. 01-99
-------------------------------	---	--	---------------------------------	-------------------------------	---------------------

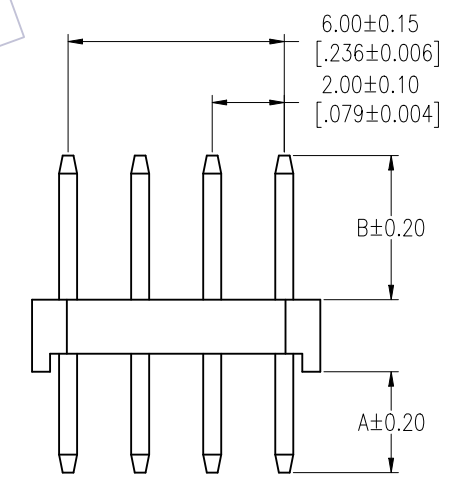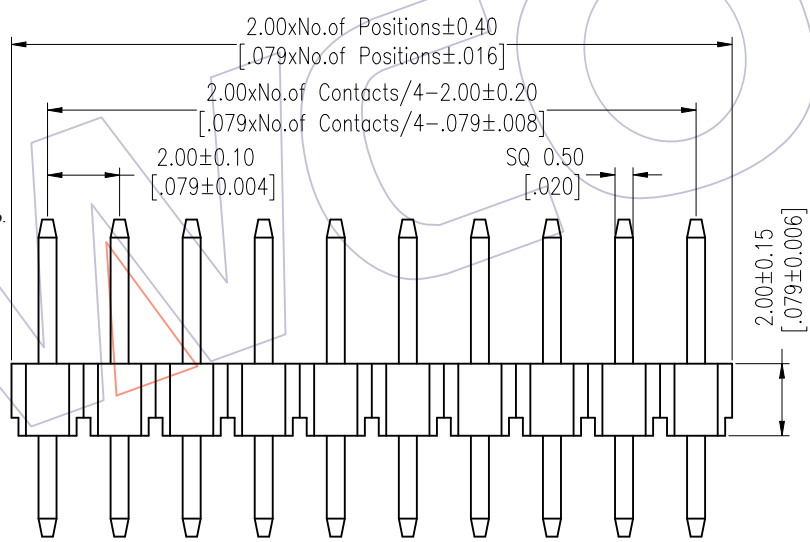

Item	Pin Length	A	B	Mating
Standard	8.80	2.80	4.00	2263
Alternate				

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
X.X ± 0.40	<i>Liu</i>	2018.01.19	UNIT mm		1220-14XXXXXXXC0XX
X.XX ± 0.25	CHECK	DATE	SIZE A4		TITLE: PH2.00 FOUR ROW 180° H=2.0
X.XXX ± 0.15			SHEET 1/1		Customer NO.
Angle ± 3°	APPROVE	DATE	PROJ.		
DIM TOL					

**WCON**  
 Http: www.wcon.com

WCON-Dongguan      WCON-Kunshan  
 Tel: +86 769 85358920      Tel: +86 512 57468408  
 Fax: +86 769 85358915      Fax: +86 512 57468468  
 E-mail: sales@wcon.com      E-mail: salesks@wcon.com