

HSF

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)





NOTES:
Rated Current: 2.0AMP.
Contact Resistance: 20mΩ Max.
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min.
Operation Temperature: -40°C to +105°C

Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: PA9T+33%G.F UL94V-0 BK

Ordering Information

1220-21 XX XX S XXX C 0 XX

No. of Pins	Contact Plating	Pin Length	Insulator	Packing	Series No.
02~40	G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold	L=A+B+C Standard:	Material C=PA9T	0=PE Bag T=Tube	01~99
	S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin				
	SN=Tin SM=Matte Tin				

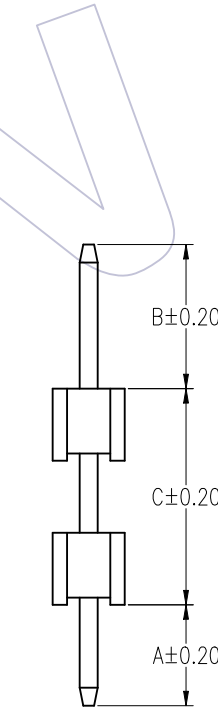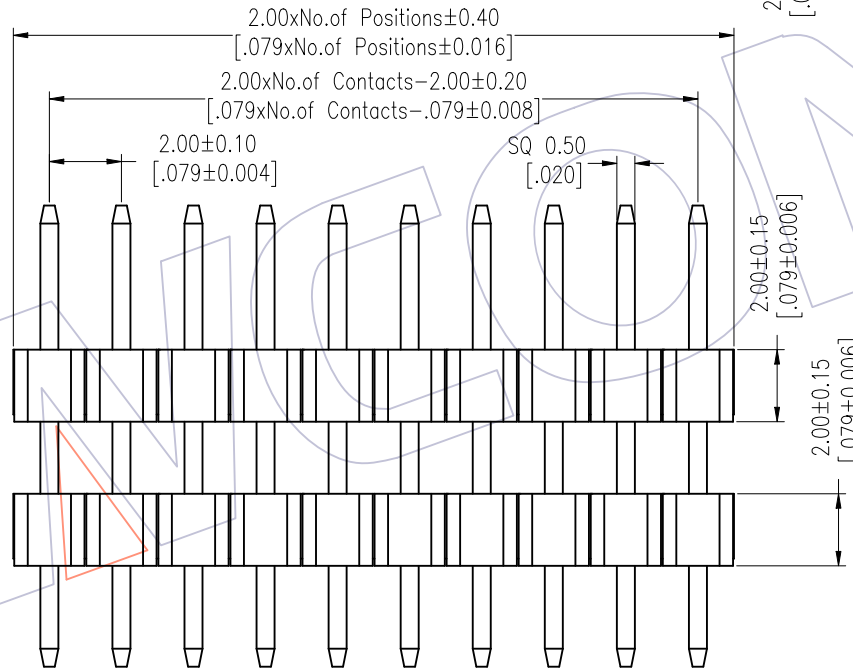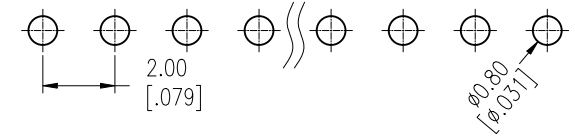

TYPE 1

TYPE 2

Item	Pin Length	A	B	C	Mating
Standard	---	2.80	2.80	---	
Alternate	---	2.80	4.00	---	2240 2243 2263 2272

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
X.X ±0.40	<i>Liu</i>	2018.01.19	UNIT mm		1220-21XXXXSXXXC0XX
X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: PH2.00 SINGLE ROW DOUBLE PLASTIC 180° H=2.0
X.XXX ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
Angle ± 3'			PROJ.		
DIM TOL					

WCON
Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920
WCON-Kunshan Tel: +86 512 57468408
Fax: +86 769 85358915 Fax: +86 512 57468468
E-mail: sales@wcon.com E-mail: salesks@wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2018/01/19	Modify P/N	
A0	2012/04/26	NEW	