
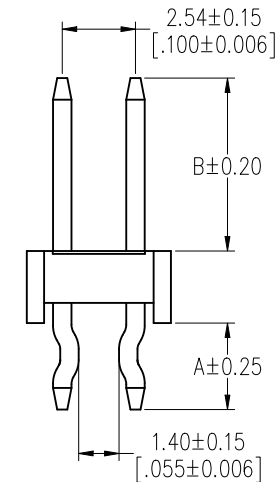
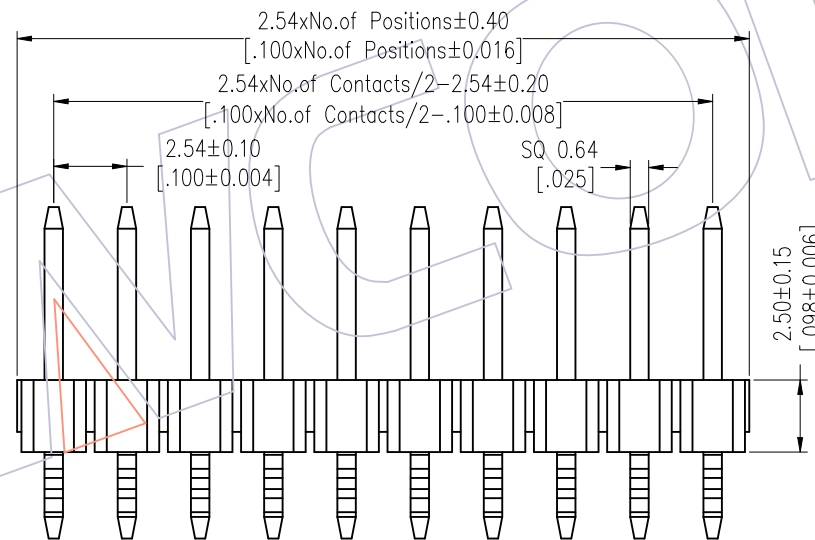
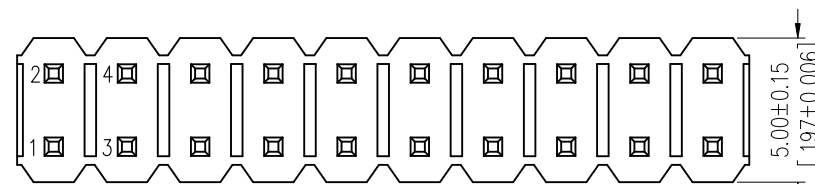


HSF

NOTES:
 Rated Current: 3.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

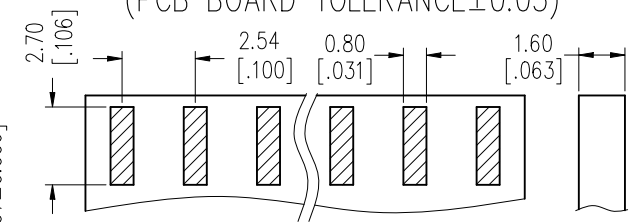

Ordering Information

1125-12 XX XX C XXX C 0 XX Δ 1

No. of Pins	Contact Plating	Pin Length	Insulator Material	Packing	Series No.
02-40	G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	L=A+B+2.6 Standard: 116=11.6	C=PA9T	0=PE Bag T=Tube	01-99

Item	Pin Length	A	B	Mating
Standard	11.60	3.00	6.00	2171 2185
Alternate				

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
x.x ± 0.40	Ruipeng	2018/01/22	UNIT mm		1125-12XXXXCXXXC0XX
x.xx ± 0.25	CHECK	DATE	SIZE A4		TITLE: PH2.54 DUAL ROW 180° H=2.5 SPLINT
x.xxx ± 0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
Angle ± 3°			PROJ.		
DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2018/01/22	Modify P/N	Δ 1
A0	2012/05/28	NEW	-----