
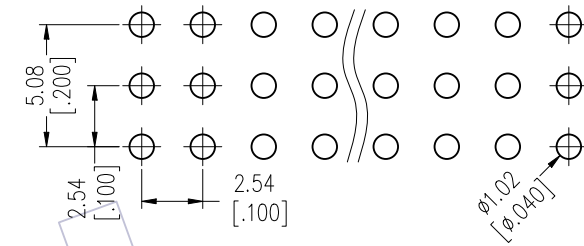


HSF

NOTES:
 Rated Current: 3.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

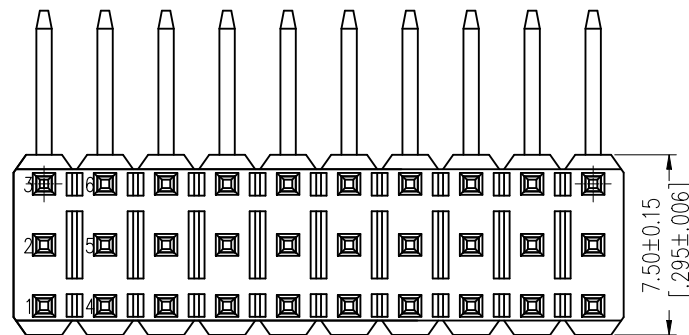

Ordering Information

1125-13 XX XX R XXX C 0 XX

No. of Pins Per Row: 03-40	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	Pin Length(Short) L=A+B+D+3.7 Standard: 138=13.8	Insulator Material C=PA9T	Packing 0=PE Bag T=Tube	Series No. 01-99
-------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------	------------------------------	-------------------------------	---------------------

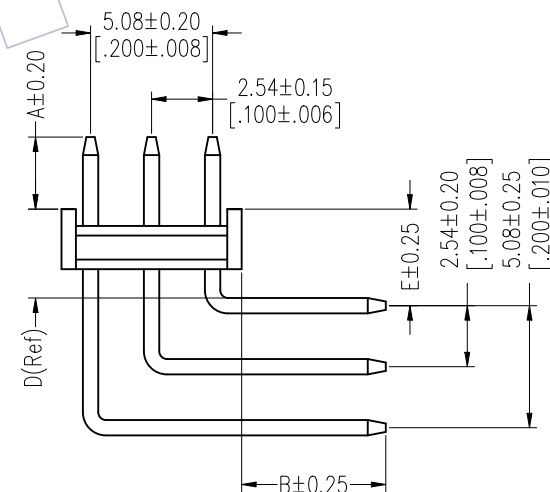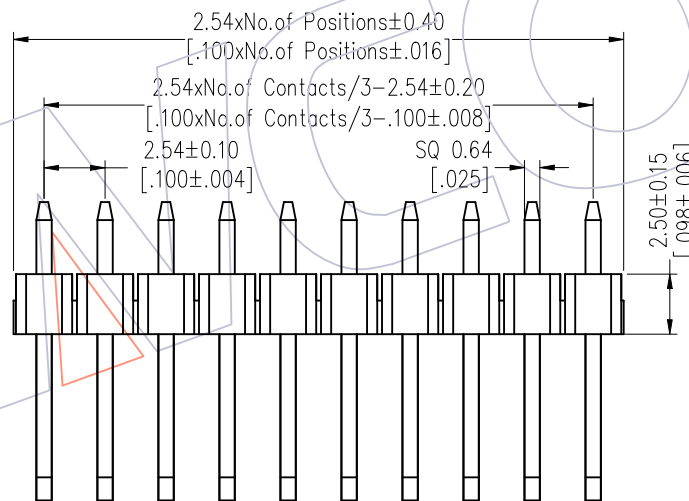

Item	Pin Length	A	E	B	Mating
Standard	13.80	3.00	4.02	6.00	2185
Alternate					

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
X.X ± 0.40	Ruipeng	2020/04/28	UNIT	mm [inch]	1125-13XXXXRXXXCOXX
X.XX ± 0.25	CHECK	DATE	SIZE	A4	TITLE: 2.54mm Pin Header THREE ROW 90° PLANE BENDING H=2.5
X.XXX ± 0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
Angle ± 3°			PROJ.		
DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2020/04/28	NEW	