
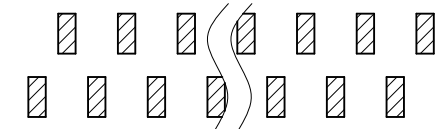


# HSF


Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

NOTES:  
 Current Rating: 1.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C


Contact Material: Phosphor Bronze  
 Contact plating: Au over Ni  
 Insulator Material: PA9T+33%GF UL94V-0

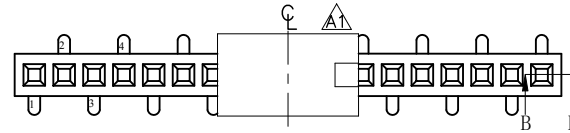



Type 1

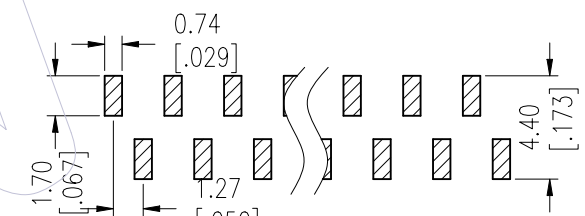

Type 2

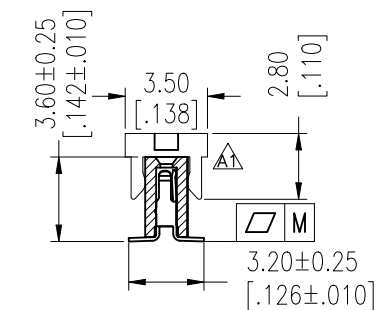

SECTION A-A

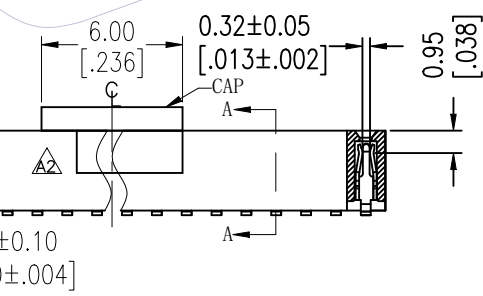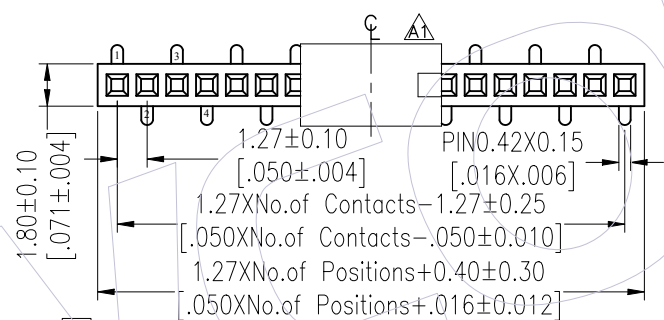

SECTION B-B

## Ordering Information

2334-1 XX M XX CUN X X

No. of Pins per Row: 02-50Pin

Contact Plating:  
 G0=Gold Flash  
 G3=10μ"Gold  
 G4=15μ"Gold  
 G5=30μ"Gold

Packing:  
 T=Tube  
 P=Tube+CAP  
 R=Tape&Reel+CAP

Series No.  
 1=Type 1  
 2=Type 2

| Item      | Pitch | Mating         |
|-----------|-------|----------------|
| Standard  | 1.27  | 1310/1315/1320 |
| Alternate |       |                |

| Pin(Per Row) | 2-15P | 16-30P | 31-50P |
|--------------|-------|--------|--------|
| M            | 0.10  | 0.15   | 0.18   |

| TITLE  | PART NO.         |
|--------|------------------|
| TYPE 1 | 2334-1XXMXXCUNX1 |
| TYPE 2 | 2334-1XXMXXCUNX2 |

| REV | DATE       | MODIFICATION DESCRIPTION | CHANGE | ANGLE | TOL   | APPROVE | DATE       | SCALE | FIT | PART NO.                        |
|-----|------------|--------------------------|--------|-------|-------|---------|------------|-------|-----|---------------------------------|
| A3  | 2023/02/03 | ADD Flatness             | XSR    |       |       |         |            |       |     | SEE TABLE                       |
| A2  | 2017/04/14 | MODIFY CAP               |        | x.x   | ±0.40 |         | 2023/02/03 | UNIT  | mm  | TITLE:                          |
| A1  | 2016/12/15 | MODIFY CAP               |        | x.xx  | ±0.25 | CHECK   | DATE       | SIZE  | A4  | 1.27mm Female Header SINGLE ROW |
| A0  | 2012/07/06 | NEW                      |        | x.xxx | ±0.15 |         |            | SHEET | 1/1 | 180°SMT H=3.40                  |
|     |            |                          |        | Angle | ± 3'  | APPROVE | DATE       | PROJ. |     | Customer NO.                    |

**WCON**  
 Http: www.wcon.com  
 WCON-Dongguan Tel: +86 769 85358920  
 WCON-Kunshan Tel: +86 512 57468408  
 Fax: +86 769 85358915  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com  
 E-mail: salesks@wcon.com