


HSF


NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+33%G.F UL94V-0

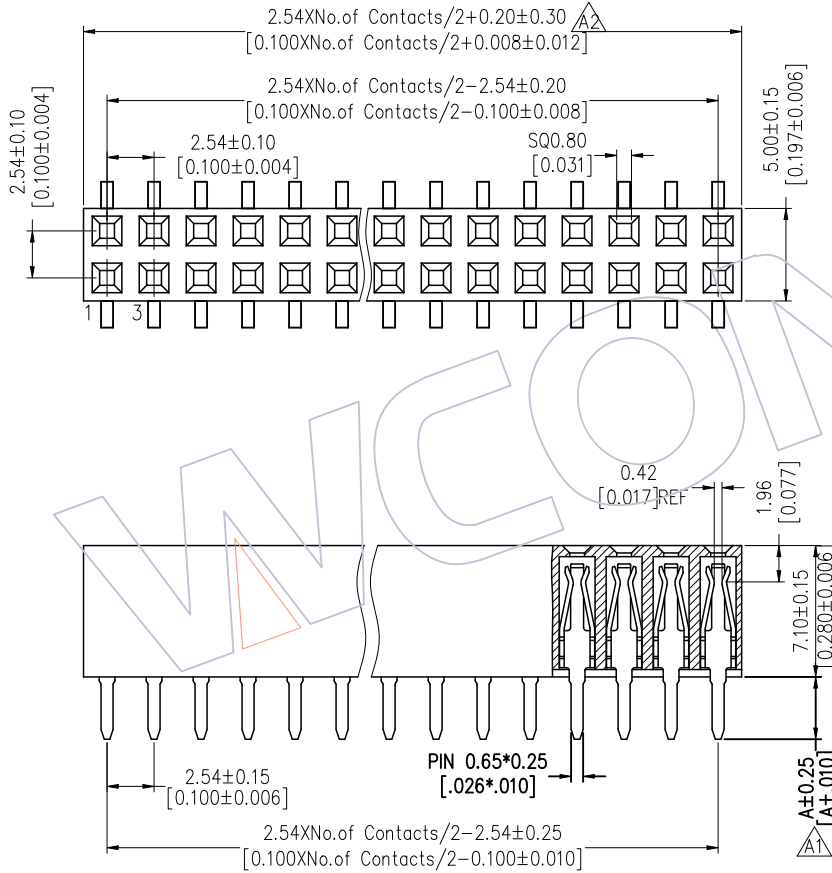

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

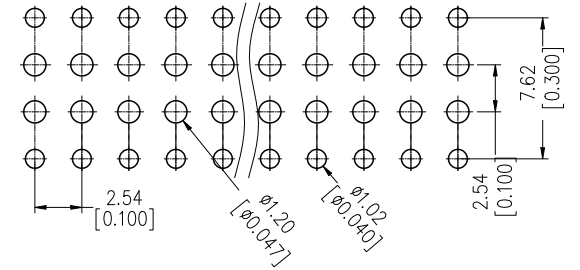

Ordering Information

2171 - 2 XX W XX CUN X X

No. of Pins per ROW: 02-40PIN

Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin
 SM=Matte Tin

Packing:
 T=Tube

1=Type 1
 2=Type 2



Type	DIM. A
Type 1	3.36
Type 2	2.96

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2023/04/15	Modify: +0.46 → +0.20	△A2	x.x ±0.40	Surong Xu	2016/10/25	UNIT	mm	2171-2XXWXXCUNXX
A1	2016/10/25	Add Type 2	△A1	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: FH2.54 DUAL ROW H=7.1
A0	2014/12/03	NEW	-----	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	Centipede Foot
				Angle ± 3°			PROJ.	☉	Customer NO.
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com