

HSF

NOTES:

Current Rating: 1.0AMP $\triangle A3$
 Contact Resistance: 35m Ω Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 500M Ω Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact Plating: Au and Sn over Ni
 Shell Material: Zinc Alloy
 Shell Plating: Ni 100u"
 Fixing Material: Phosphor Bronze
 Fixing Plating: Sn over Ni
 Housing Material: PBT+30%G.F(UL94V-0)
 Cover Material: PBT+30%G.F(UL94V-0)

Ordering Information


6321-0 XX R D SX M W A 01

No. of Pins
 14P 36P
 20P 50P
 26P 68P


Contact Plating
 S1=3u"Gold/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin

A=Tray

$\triangle A4$	$\triangle A1$				
53.85	41.91	46.83	57.93	63.83	68
42.42	30.48	35.40	46.50	52.40	50
33.53	21.59	26.51	37.61	43.51	36
27.18	15.24	20.16	31.26	37.16	26
23.37	11.43	16.35	27.45	33.35	20
19.56	7.62	12.54	23.64	29.54	14
DIM.J	DIM.K	DIM.H	DIM.G	DIM.F	PIN数

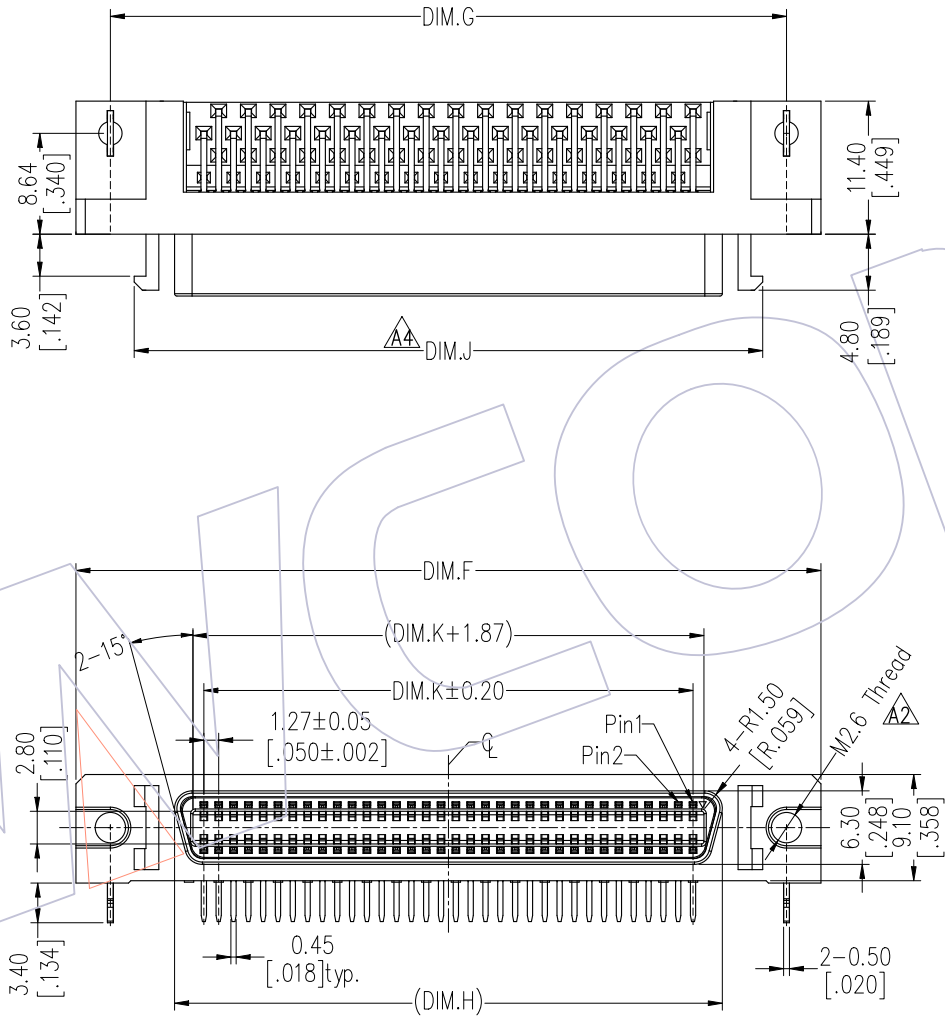

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

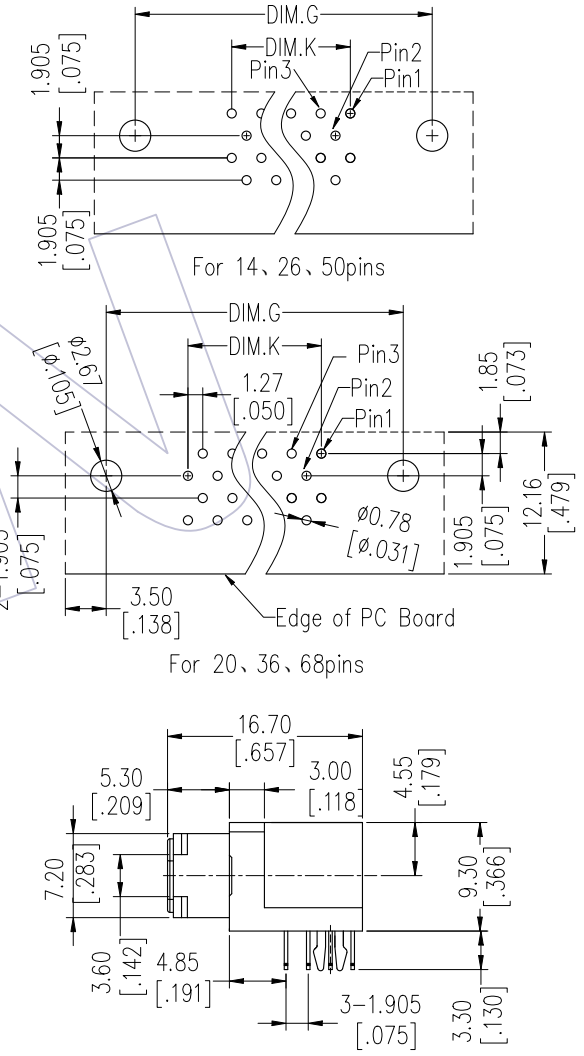

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A4	2022/11/08	Modify DIM.J	PAN			OPERATION	PAN	2022/11/08	UNIT	mm	6321-0XXRDSXMWA01
A3	2020/12/21	Correct Current Rating to 1.0AMP	XSR	x.x	± 0.40	CHECK			SIZE	A4	TITLE:
A2	2019/11/18	Modify	XSR	x.xx	± 0.25	APPROVE			SHEET	1/1	1.27PITCH CEN TYPE SCSI FEMALE DIP (鱼叉纵向)
A0	2013/07/03	NEW	-----	x.xxx	± 0.15	DATE			PROJ.		Customer NO.
				Angle	$\pm 3^\circ$						

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: salesks@wcon.com