



# HSF

**NOTES:**




Current Rating: 2.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: PA9T+33%G.F UL94V-0

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

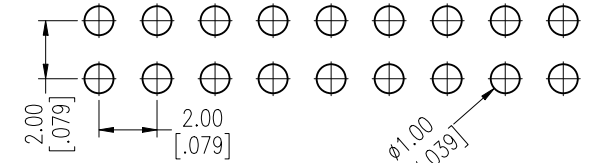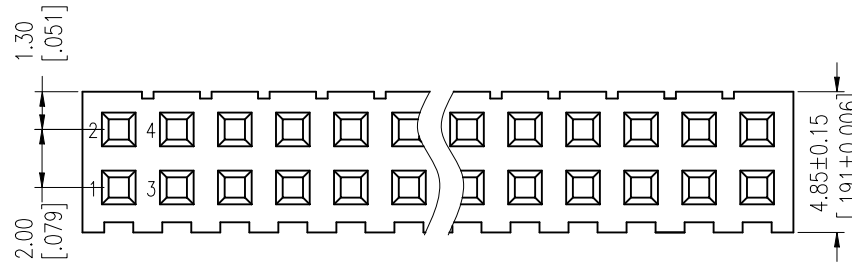

ø1.00  
 [.039]

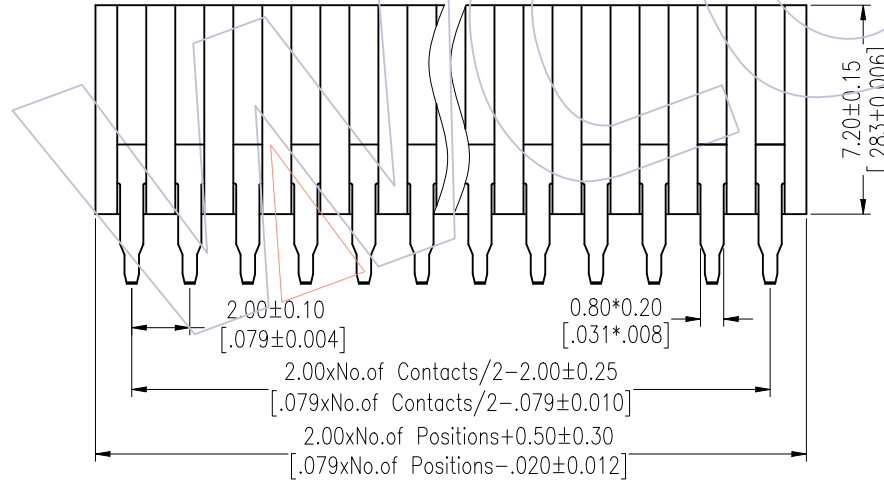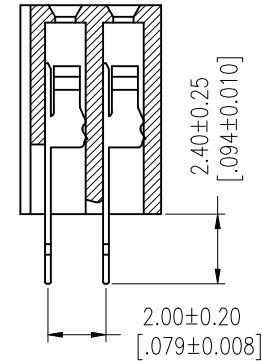

## Ordering Information

2272-2 XX S XX CUN T 2

No. of Pins per Row: 02~50Pin  
 Contact Plating: G0=Gold Flash, G3=10μ"Gold, G4=15μ"Gold, G5=30μ"Gold, S0=Sel. Gold Flash/Tin, S3=Sel. 10μ"Gold/Tin, S4=Sel. 15μ"Gold/Tin, S5=Sel. 30μ"Gold/Tin, SN=Tin, SM=Matte Tin  
 Packing: T=Tube

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2021/08/20	ADD 2*2P VIEW	-----	x.x ±0.40	XSR	2021/08/20	UNIT mm		2272-2XXSXXXUNT2
A0	2012/07/19	NEW	-----	x.xx ±0.25	CHECK	DATE	SIZE A4		TITLE: FH2.00mm DUAL ROW 180°DIP H=7.20
				x.xxx ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
				Angle ± 3°			PROJ.		
				DIM TOL					

# WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com  
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com