


HSF

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

NOTES:
Rated Current: 1.75AMP
Contact Resistance: 20mΩ max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 5000MΩ min
Operation Temperature: -55°C to +125°C

Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: LCP +30%G.F UL94V-0

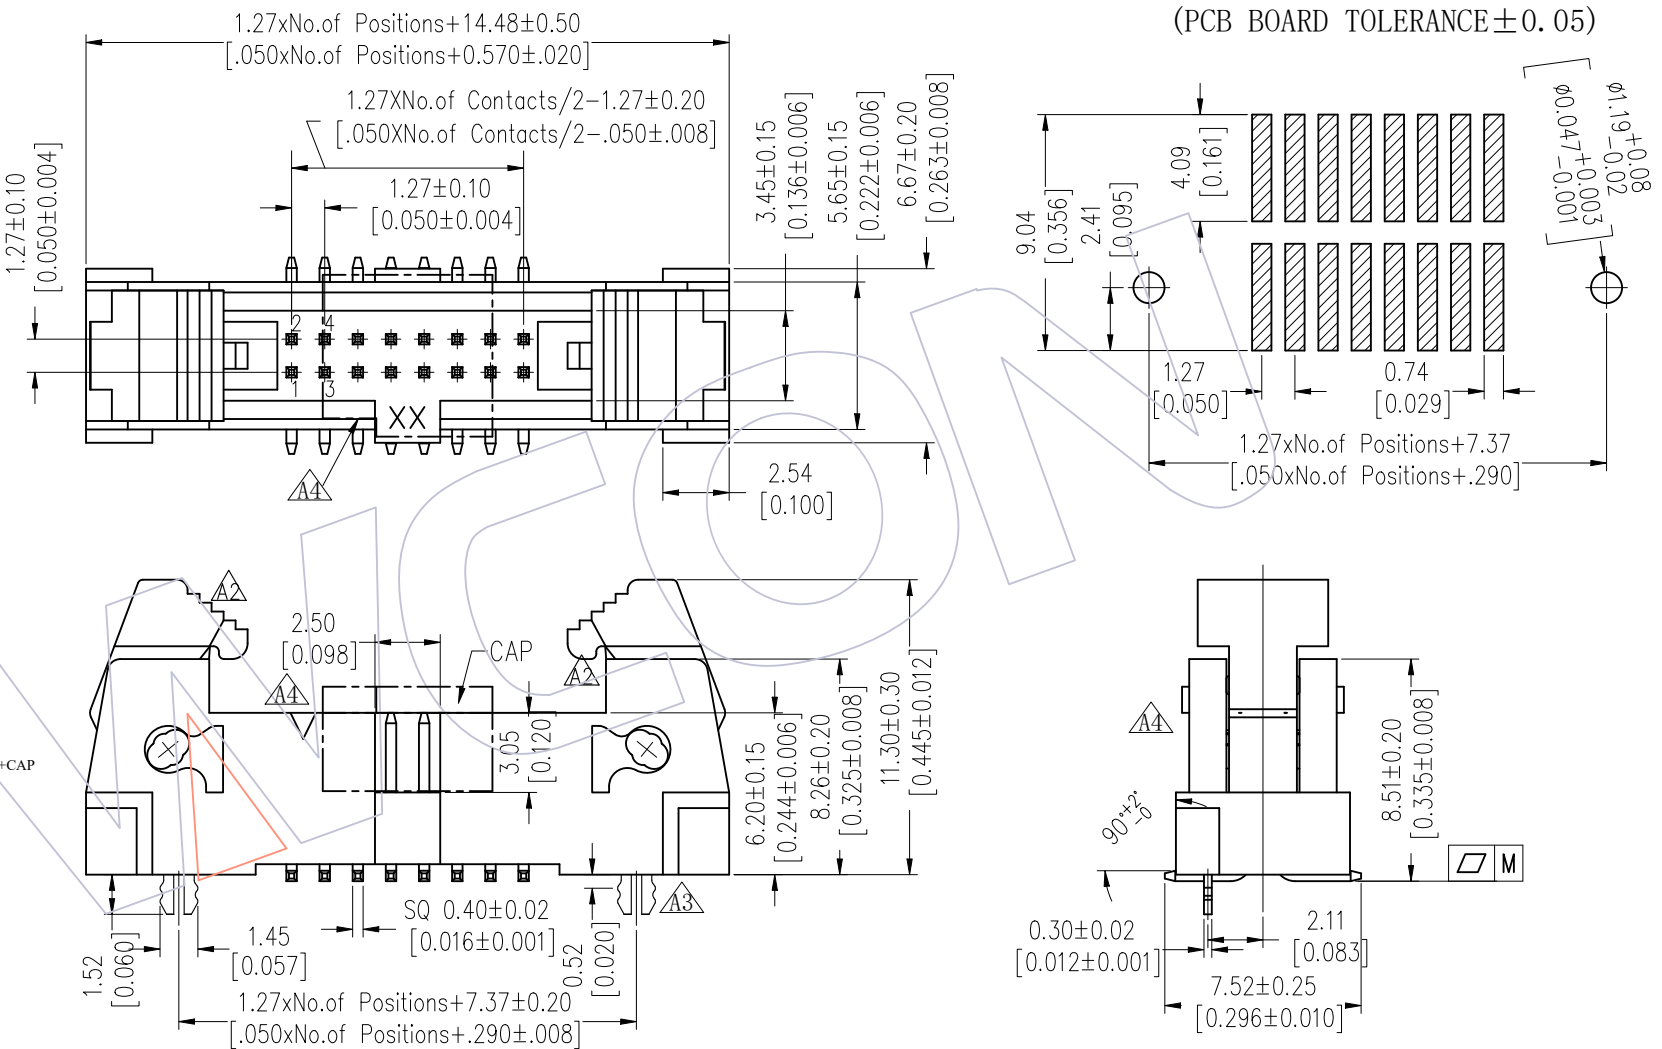

Ordering Information

3231-XX M XX B S T 2

No.of Pins	Contact Plating	Insulator Color	Packing
06 26	G0=Gold Flash	B=Black	T=Tube
08 30	G3=10u"Gold		P=Tube+CAP
10 34	G4=15u"Gold		R=Tape&Reel+CAP
14 40	G5=30u"Gold		
16 44	S0=Gold Flash/Tin		
20 50	S3=10u"Gold/Tin		
24	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		
	SN=Tin		

A5	PIN(PerRow)	06-20P	24-40P	44-50P
	M	0.10	0.12	0.15

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A5	2023/02/17	Add Flatness	A5	DuYing	DuYing	2023/02/17	UNIT mm		3231-XXMXXBST2
A4	2012/08/31	Modify CAP	A4	Tsingsn	CHECK	DATE	SIZE A4		TITLE: 1.27 Ejector Header
A3	2012/05/30	Modify drawing			APPROVE	DATE	SHEET 1/1		"S" Type SMT With fork
A0	2009/11/21	NEW					PROJ		Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--