


HSF

NOTES:

1. RATED CURRENT: 1A MAX (PER 1 POS)
Rating Voltage : 100VAC
2. Contact Resistance: 30mΩ Max.
3. Withstand Voltage: 500VAC;
4. Insulation Resistance: 100MΩ MIN
5. Operation Temperature: -40°C - 125°C
6. Plastic Material: PBT, BLACK
7. HOUSING ARE SOLD SEPARATELY
8. APPLICABLE CRIMP PIN CONTACT

APPLICABLE CONTACT PART NO	APPLICABLE WIRE	INSULATION OUTER DIAMETER
MO06E-MTBXX01	(24-22AWG)	φ 0.8 - φ 1.2
MO06E-MTBXX02	(28-26AWG)	φ 0.7 - φ 1.2

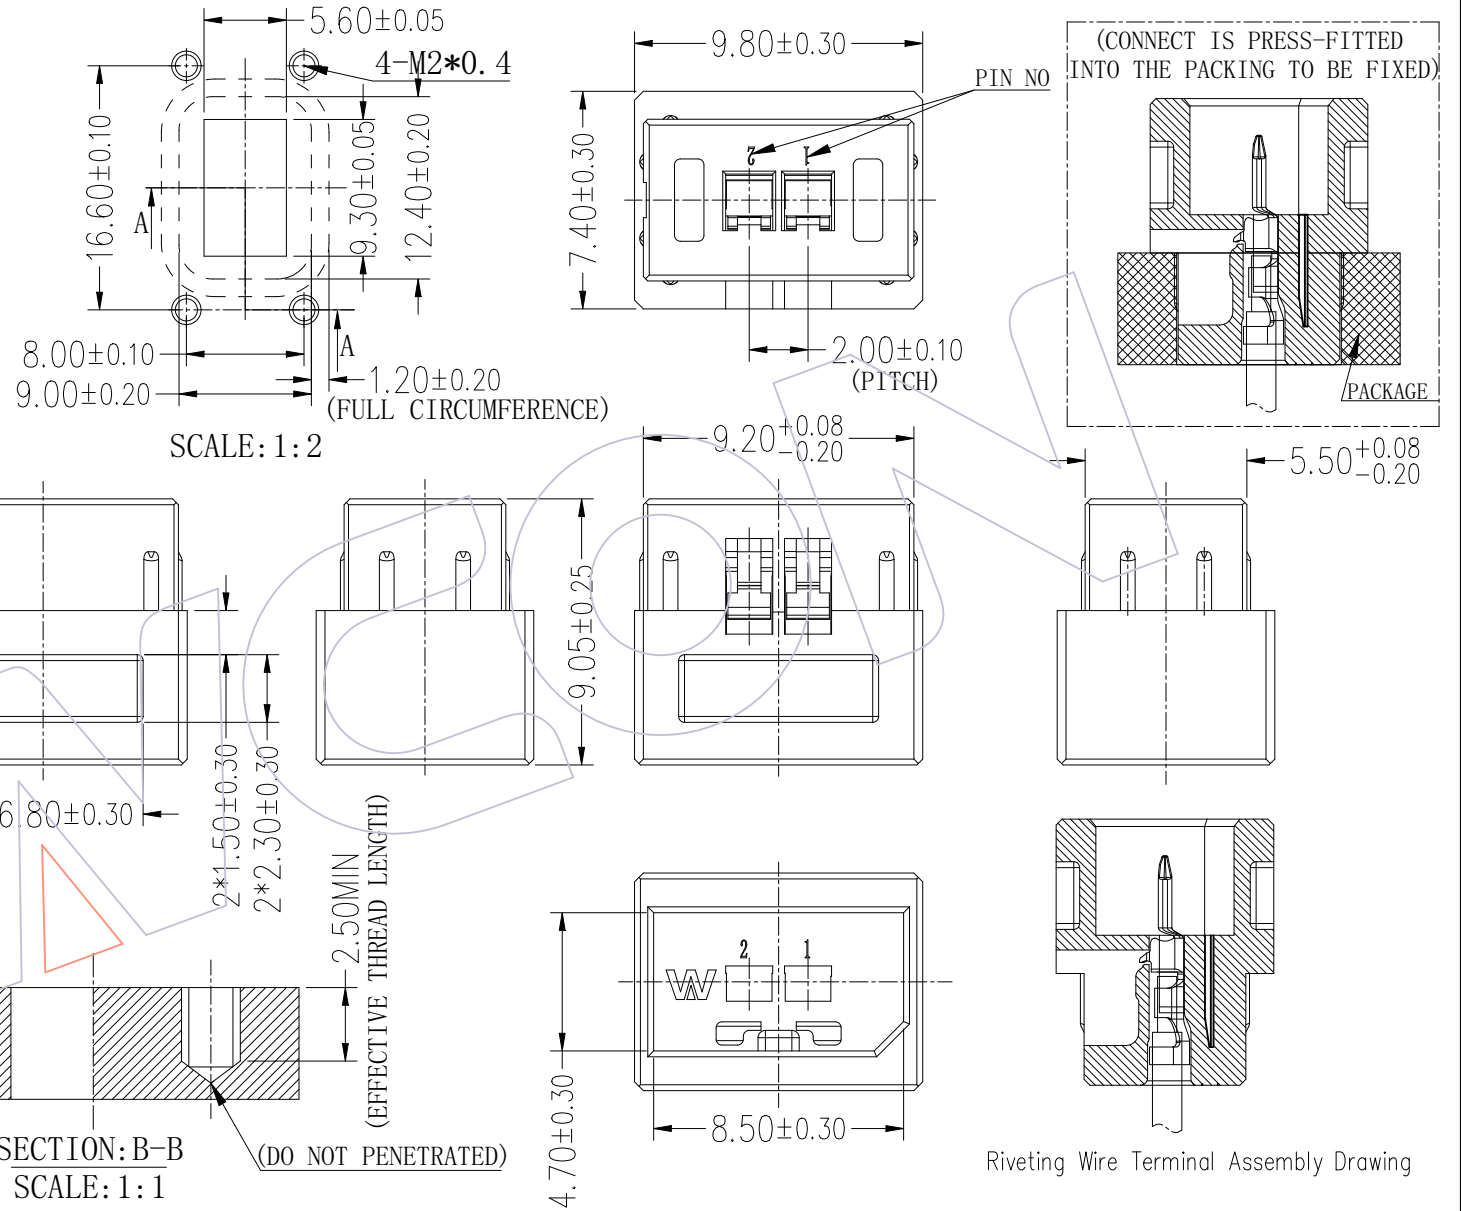

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
0	2023/03/20	NEW		X.X ±0.40	shi chun	2023. 03. 20	UNIT	mm	GMJE06B-2002A02 (W)
				X.XX ±0.25	CHECK	DATE	inch		
				X.XXX ±0.15	APPROVE	DATE	SHEET	1/2	TITLE:
				Angle ± 3°			PROJ.	⌀	2.0mm Servo Motor 06 Series
				DIM TOL					Brake Rec, 2P Plastic Body
									Customer NO. --

WCON
Http: www.wcon.com

<p>WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com</p>	<p>WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com</p>
---	--

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H