

HSF

IDC HOUSING MATERIAL

Insulation Material:PBT+30%GF(UL94V-0)

Contact Material:Phosphor Bronze

Contact plating: Au or Sn Over Ni

SPECIFICATIONS

Insulation Resistance:5MΩ Min

Contact Resistance:1.0Ω Max

Withstand Voltage:DC 300V, 10S


The Cable Assembly Must 100% Test

CABLE MATERIAL

Insulation:UL 2651,Grey Red Side

Conductor:28AWG(7/0.12mm)

Electrical:300V

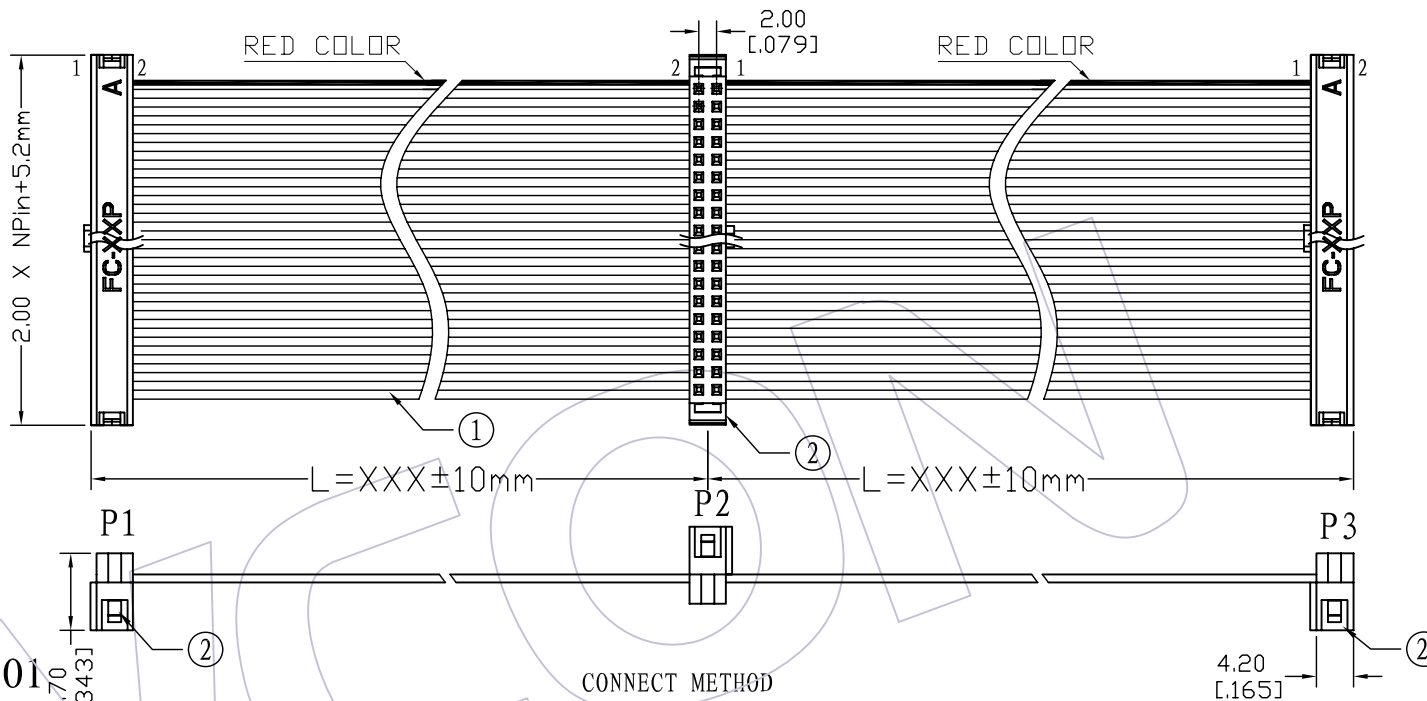

Ordering Information

FA23 - xx xx E A B xxx - 01

No.OF Pins
06~64p

Contact Plating:

G0=Gold Flash

G3=10u"Gold

G4=15u"Gold

G5=30u"Gold

S0=Gold Flash/Ni

S3=10u"Gold/Ni

S4=15u"Gold/Ni

S5=30u"Gold/Ni

SN=Tin

Connector Color:


B=Black

Connector Direction:

E=Middle OPPOSITE

Length of Line(mm)

CONNECT METHOD



②	5222-XXYPXXBW01	CONN.	2.00 IDC **P PBT Black Phosphor Bronze Plating Xu" gold With Bump	3	SET
①	F1U-B28GXXD0-XXXX-1	WIRE	UL2651 PH1.0mm XXP 28AWG(7/0.12TC) PVC Grey Marking Red Side	XXXX	MM
NO.	PART NO.	NAME	TITLE	QT'Y	UNIT

					OPERATION	DRAW	BEN	09/08/20	SCALE	1:1	WCON 维峰五金电子有限公司 WAFE HARDWARE ELECTRONICS CO. LTD		
					x.x ±0.40	DESIGN			UNIT	mm			
					x.xx ±0.25	CHECK			SIZE	A4		PART NO.	FA23 - xxxxEABxxx - 01
					x.xxx ±0.15	APPROVE			SHEET	1/1		TITLE:	2.00 IDC Drawing
AO	09/08/20		NEW		Angle ± 3'				PROJ.	Customer NO.			
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE	OPERATION	NAME	DATE	SCALE	UNIT	PART NO.	TITLE	