


# HSF


SPECIFICATIONS:  
 Contact Resistance: 1Ω Max.  
 Insulation Resistance: 5MΩ Min.  
 Withstand Voltage: 300V AC  
 The Cable Assembly Must 100% Test

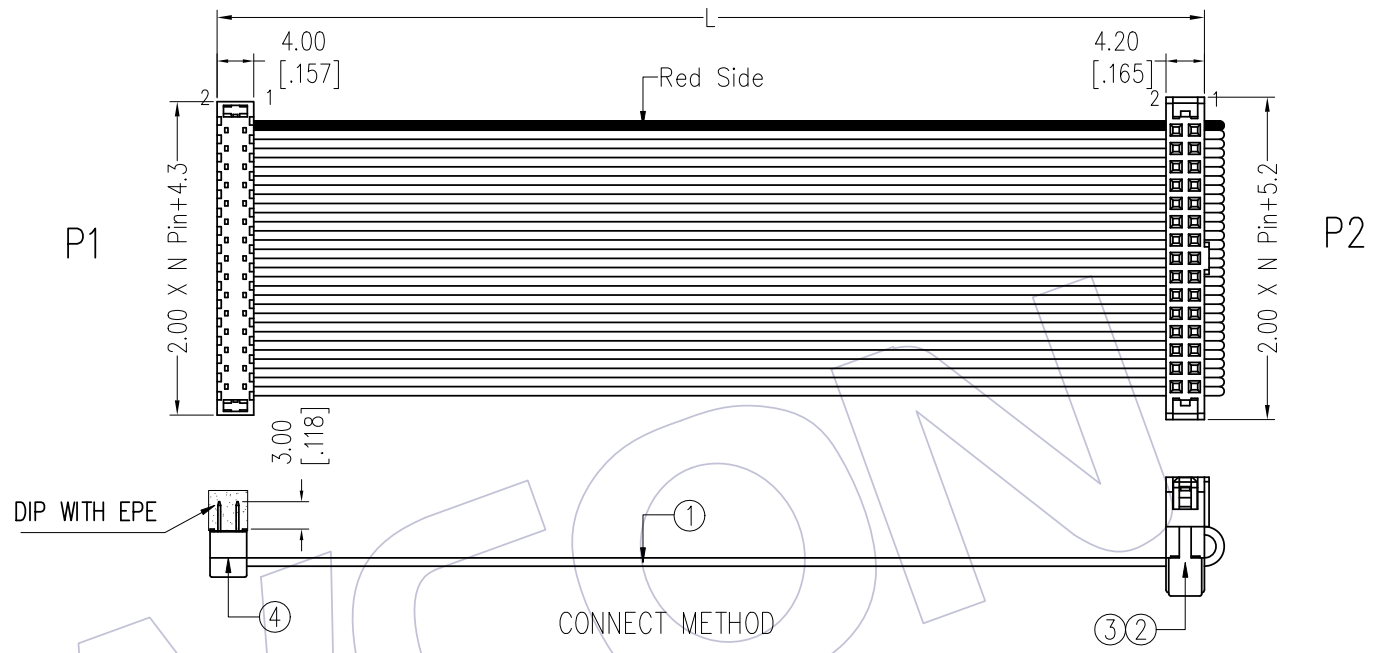

## Ordering Information

FB22 - XX XX F A B XXX - 04

No.OF Pins: 06~64p  
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Ni, S3=10u"Gold/Ni, S4=15u"Gold/Ni, S5=30u"Gold/Ni, SN=Tin  
 Connector Color: B=Black  
 Connector Direction: F=same Direction  
 Length of Line(mm): Wcon Code 01~99



| LENGTH    | TOLERANCE |
|-----------|-----------|
| ≤100      | ±5        |
| 101~1000  | ±10       |
| 1001~3000 | ±20       |
| 3001~     | ± Lx1%    |

| NO. | PART NO.            | NAME  | TITLE  | QT'Y | UNIT |
|-----|---------------------|-------|--|------|------|
| ④   | 5320-XXPS0B01       | CONN. | 2.00 DIP Plug,XP,PBT BK,P/Bronze,Sel.G'F/Ni                      | 1    | PCS  |
| ③   | G5220-XXDB01        | SR    | 2.00 IDC Socket SR,XP,PBT BK                                     | 1    | PCS  |
| ②   | 5222-XXYPS0BW01     | CONN. | 2.00 IDC Socket,XP, Spring Type,W/T Bump,PBT BK,P/Bronze,XuAU/Ni | 1    | PCS  |
| ①   | F1U-B28GXXD0-XXXX-X | WIRE  | 1.00 Flat Cable,XP,PVC Grey,Red Side,UL2651,28AWG(7/0.12)        | -    | MM   |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | OPERATION   | DRAW    | DATE       | SCALE | Fit       | PART NO.           |
|-----|------|--------------------------|--------|-------------|---------|------------|-------|-----------|--------------------|
|     |      |                          |        | X.X ±0.40   | XSR     | 2020/11/09 | UNIT  | mm [inch] | FB22-XXXXFABXXX-04 |
|     |      |                          |        | X.XX ±0.25  | CHECK   | DATE       | SIZE  | A4        | TITLE:             |
|     |      |                          |        | X.XXX ±0.15 | APPROVE | DATE       | SHEET | 1/1       | 2.0 DIP+2.0 IDC+SR |
|     |      |                          |        | Angle ± 3'  |         |            | PROJ. | ☉         | CUSTOMER NO.       |
|     |      |                          |        | DIM         | TOL     |            |       |           |                    |

**WCON**  
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com