


HSF

HOUSING MATERIAL
 Insulation Material:PBT+30%GF(UL94V-0)
 Contact Material:Phosphor Bronze
 Contact plating:Au or Sn Over Ni

SPECIFICATIONS
 Insulation Resistance:5MΩ Min
 Contact Resistance:1.0Ω Max
 Withstand Voltage:DC 300V, 10S
 The Cable Assembly Must 100% Test

CABLE MATERIAL
 Insulation:UL 2678,Grey Red Side
 Conductor:30AWG(7/0.102mm)
 Electrical:300V

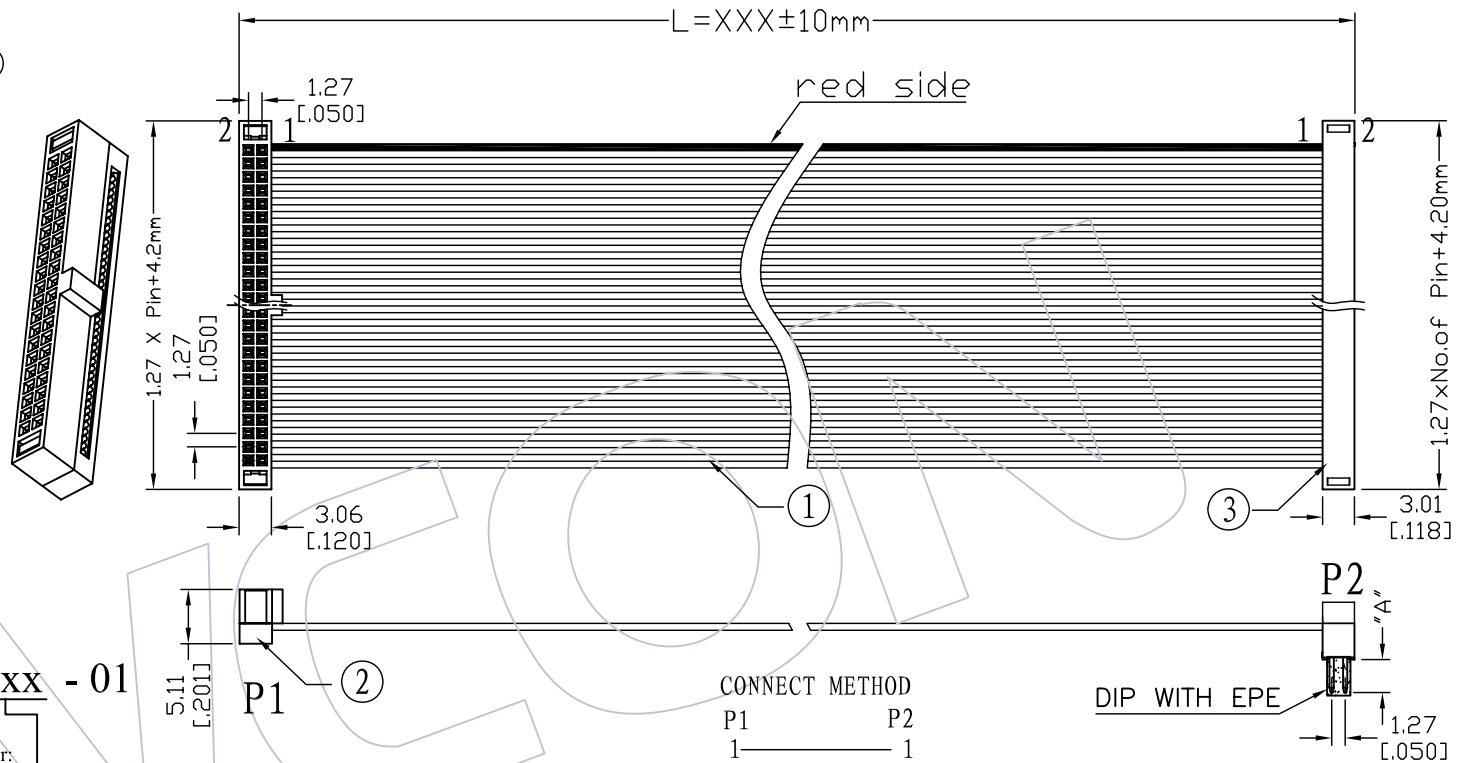

Ordering Information

FB32 - xx xx G A B xxx - 01

No.OF Pins
06~100p

Contact Plating:
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold

Connector Direction:
 G=Opposite Direction

Connector Color:
 B=Black

Length of Line(mm)


S0=Gold Flash/Ni
 S3=10u"Gold/Ni
 S4=15u"Gold/Ni
 S5=30u"Gold/Ni
 SN=Tin

CONNECT METHOD

P1 P2
 1 1
 2 2
 3 3

XX XX
 XX XX

DIP WITH EPE



PART NO.	DIM "A"
5330-XXPXXB01	3.10
5330-XXPXXB02	1.90

③	5330-XXPXXB01	CONN.	1.27 DIP **P PBT Black Phosphor Bronze Plating Xu" gold	1	SET
②	5232-XXUPXXBW01	CONN.	1.27 IDC **P PBT Black With Bump Phosphor Bronze Plating Xu" gold	1	SET
①	F3U-A30GXXD0-XXXX-1	WIRE	UL2678 PH0.635mm XXP 30AWG(7/0.102TC) PVC Grey Marking Red Side	XXXX	MM
NO.	PART NO.	NAME	TITLE	QT'Y	UNIT

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	BEN	09/06/25	SCALE	1:1	WCON 维峰五金电子有限公司 WAFE HARDWARE ELECTRONICS CO.LTD			
					X.X	±0.40				UNIT	mm			
					X.XX	±0.25				SIZE	A4	PART NO.	FB32-xxxxGABxxx-01	
					X.XXX	±0.15				SHEET	1/1	TITLE:	1.27 IDC TO 1.27 DIP	
					Angle	± 3'				PROJ.	☞	Customer NO.		
					DIM	TOL								