HSF

NOTES:
Current Rating: 3.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −40℃ to +105℃

Contact Material:Phosphor Bronze Or Brass
Contact plating:Au Or Sn over Ni
Insulator Material:PBT+30%G.F UL94V−0

6P Without Slot "M" and "N"
8P−12P With Slot "M", Without Slot "N"
14P−64P With Slot "M" and "N"

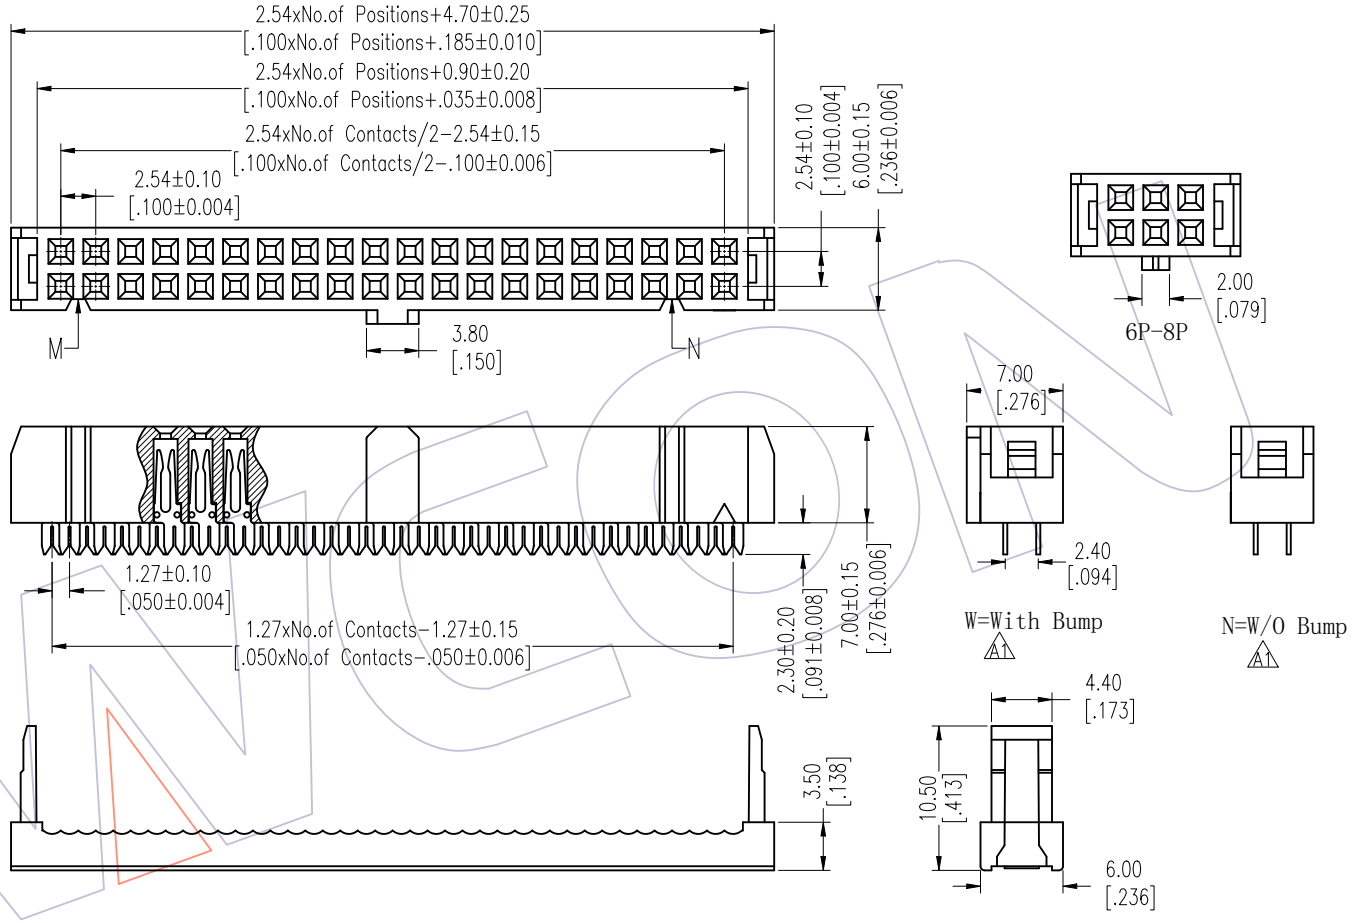

Ordering Information

5211- XX D B XX B X 01

- Two Parts: Conn+Cover
- No.of Pins: 06P 26P, 08P 30P, 10P 34P, 12P 36P, 14P 40P, 16P 44P, 18P 50P, 20P 60P, 22P 64P, 24P
- Contact Material: B=Brass, P=Phosphor Bronze
- Contact Plating: S0=Gold Flash/Ni, S3=10u"Gold/Ni, S4=15u"Gold/Ni, S5=30u"Gold/Ni, SN=Tin
- Color Insulator: B=Black, G=Grey(427C)
- Bump: N=W/O Bump, W=With Bump

Item	Pitch	Mating
Standard	2.54	3110/3210
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A2	2022/05/19	Modify TITLE A2	DuYing
A1	2012/12/21	MODIFY A1	JYHuang
A0	2012/10/11	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW DuYing	DATE 2022/05/19	SCALE	FIT
CHECK	DATE	UNIT	mm
APPROVE	DATE	SIZE	A4
		SHEET	1/2
		PROJ.	

PART NO. 5211-XXDBXXBX01

TITLE: 2.54 IDC SOCKET (BOTH SIDE CONTACT)

Customer NO.

WCON
Http: www.wcon.com

WCON−Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E−mail: sales@wcon.com

WCON−Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E−mail: salesks@wcon.com