

HSF

NOTES:


Rated Current:2.0A

Rated Voltage:125V AC

Contact Resistance:20mΩ max

Withstand Voltage:500V AC/Minute

Operation Temperature:-40℃ to+105℃

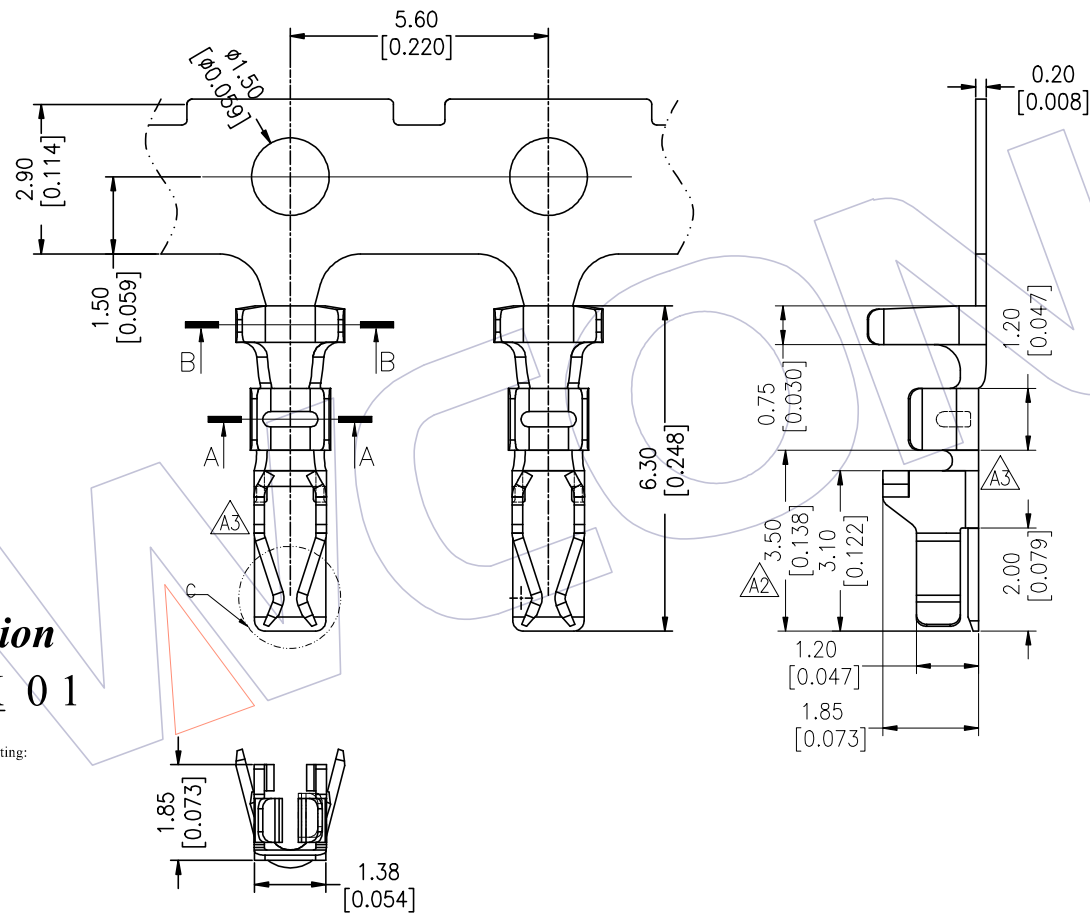

Ordering Information

WF2005 - TP XX 0 1

Contact Plating:
SN=Tin

Dimensional & Ordering Information

Part No.	Thickness	Finish	Material	Wire Range	Q'ty/Reel
WF2005-TPSN01	0.20	Tin-Plated	Phosphor bronze	AWG#26~#30	10,000pcs

A3	13/03/06	Modify Drawing	—	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	WCON Http: www.wcon.com WCON-Dongguan WCON-Kunshan Tel: +86 769 85358920 Tel: +86 512 57468408 Fax: +86 769 85358915 Fax: +86 512 57468468 E-mail: sales@wcon.com E-mail: sales@wcon.com
A2	12/02/24	Modify Drawing	—	X.X ±0.40	JYHuang	2013/03/06	UNIT	mm	WF2005-TPXX01	
A1	09/09/03	Change Size	—	X.XX ±0.25	CHECK	DATE	SIZE	A4	YH 2.00 TERMINAL	
A0	08/07/04	NEW	—	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3° DIM TOL			PROJ.			