







NOTES:
 Rated Current:10.0 AMP
 Contact Resistance:20 mΩ Max
 Withstand Voltage:2000 V AC/DC
 Insulation Resistance:1000 MΩ min
 Operation Temperature:-40℃ to +105℃
 Wire Range:26~12 AWG
 Wire Strip Length: 7 mm
 No.of Positions:2~24

Terminal Material:Phosphor Bronze
 Terminal Plating:
 Matte Tin Plated Over Nickel
 Spring Blade Material:Stainless Steel
 Up Cover Material:
 (High Temp.)Thermoplastic.UL94 V-0
 Below Cover Material:
 (High Temp.)Thermoplastic.UL94 V-0
 Push Pole Material:
 (High Temp.)Thermoplastic.UL94 V-0

2P Without RAMP Locking "A"

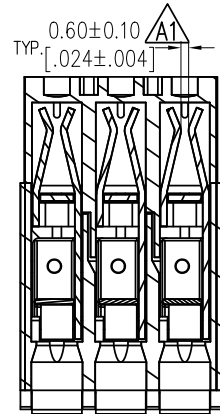

SEC A-A

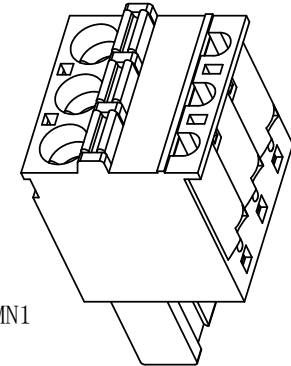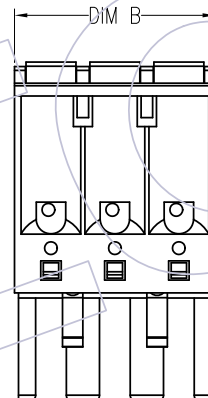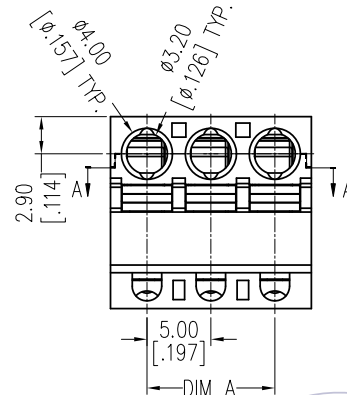


Ordering Information:

P F 500 S-1 F XX A SM N 1 N
 F=Female Pitch 500=5.00
 No.of Pins 02-24P Color A=Green
 Contact Plated SM=Matte Tin Type N=Without Screw S=With Latch
 Blank=W/T WCON LOGO N=W/O WCON LOGO

No.Of PIN	DIM.A	DIM.B	DIM.C
0 2	5.00±0.30	10.70±0.35	10.08±0.35
0 3	10.00±0.30	15.70±0.35	15.08±0.35
0 4	15.00±0.30	20.70±0.35	20.08±0.35
0 5	20.00±0.30	25.70±0.35	25.08±0.35
0 6	25.00±0.30	30.70±0.35	30.08±0.35
0 7	30.00±0.30	35.70±0.35	35.08±0.35
0 8	35.00±0.30	40.70±0.35	40.08±0.35
0 9	40.00±0.30	45.70±0.35	45.08±0.35
1 0	45.00±0.30	50.70±0.35	50.08±0.35
1 1	50.00±0.35	55.70±0.40	55.08±0.40
1 2	55.00±0.35	60.70±0.40	60.08±0.40
1 3	60.00±0.35	65.70±0.40	65.08±0.40
1 4	65.00±0.35	70.70±0.40	70.08±0.40
1 5	70.00±0.35	75.70±0.40	75.08±0.40
1 6	75.00±0.35	80.70±0.40	80.08±0.40
1 7	80.00±0.35	85.70±0.40	85.08±0.40
1 8	85.00±0.35	90.70±0.40	90.08±0.40
1 9	90.00±0.35	95.70±0.40	95.08±0.40
2 0	95.00±0.35	100.70±0.40	100.08±0.40
2 1	100.00±0.40	105.70±0.40	105.08±0.40
2 2	105.00±0.40	110.70±0.40	110.08±0.40
2 3	110.00±0.40	115.70±0.40	115.08±0.40
2 4	115.00±0.40	120.70±0.40	120.08±0.40

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	WCON Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com	
A2	2019/06/20	Add W/T WCON LOGO	/	x.x ±0.40	XSR	2019/06/20	UNIT	mm	PF500S-1FXXASMN1(N) A2		
A1	2019/05/19	Add Explosion view & Material List	/	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: 5.00mm Pitch Female Spring Plugs For Pluggable Terminal Blocks Without Screw	Customer NO.	
A0	2019/03/19	NEW	/	x.xxx ±0.15	APPROVE	DATE	SHEET	1/2			
				Angle ± 3°			PROJ.				
				DIM TOL							

HSF

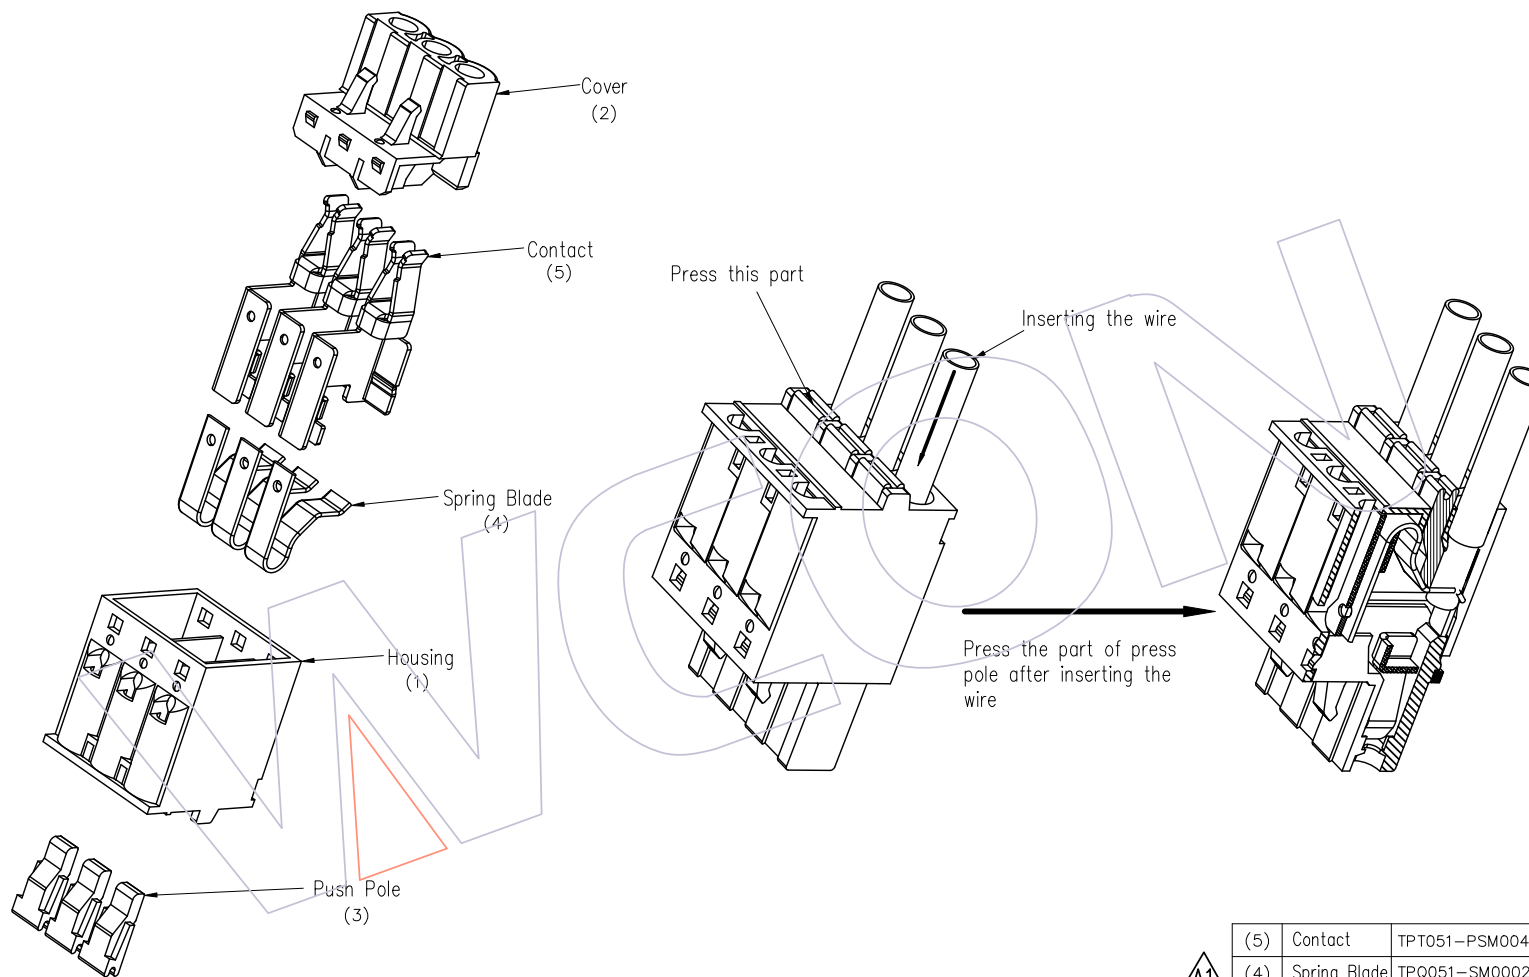

Explosion view

(5)	Contact	TPT051-PSM004	N	C5191R-H T=0.5mm
(4)	Spring Blade	TPQ051-SM0002	N	SUS301R-3/4H
(3)	Push Pole	HPH508S-B101	N	PA66 UL94-V0
(2)	Cover	XPC500S-1XXB1AN1N	1	PA66 UL94-V0
(1)	Housing	XPF500S-1XXB1AW1(N)	1	PA66 UL94-V0
ITEM	TITLE	PART NO.	Q'TY	Material

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.				
A2	2019/06/20	Add W/T WCON LOGO	/	X.X	±0.40	2019/06/20	UNIT	mm	PF500S-1FXXASMN1(N)				
A1	2019/05/19	Add Explosion view & Material List	/	X.XX	±0.25	DATE	SIZE	A4	TITLE: 5.00mm Pitch Female Spring Plugs For Pluggable Terminal Blocks Without Screw				
A0	2019/03/19	NEW	/	X.XXX	±0.15	DATE	SHEET	2/2	Customer NO.				
				Angle	± 3°		PROJ.						
				DIM	TOL								

WCON

Http: www.wcon.com

WCON-Dongguan	WCON-Kunshan
Tel: +86 769 85358920	Tel: +86 512 57468408
Fax: +86 769 85358915	Fax: +86 512 57468468
E-mail: sales@wcon.com	E-mail: salesks@wcon.com