

HSF

NOTES:

Rated Current:15.0 AMP
Contact Resistance:8.0 milliohm Max
Withstand Voltage:2000 V AC/DC
Insulation Resistance:1000 Megohm min
Operation Temperature:-40℃ to +105℃







Housing Material:PA66+30%GF(UL94V-0)
Contact Material:Brass
Terminal Plating:
Matte Tin Plated Over Nickel

Ordering Information:

P M 750- 1 S XX A SM 1 N

M=Male Pitch 750=7.50 No.of Pins 02-20P Color A=Green Contact Plated SM=Matte Tin Series No. Blank=W/T WCON N=W/O WCON

PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B
02	7.50	15.00	12	82.50	90.00
03	15.00	22.50	13	90.00	97.50
04	22.50	30.00	14	97.50	105.00
05	30.00	37.50	15	105.00	112.50
06	37.50	45.00	16	112.50	120.00
07	45.00	52.50	17	120.00	127.50
08	52.50	60.00	18	127.50	135.00
09	60.00	67.50	19	135.00	142.50
10	67.50	75.00	20	142.50	150.00
11	75.00	82.50			

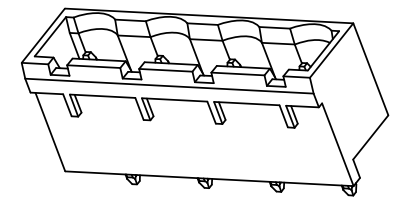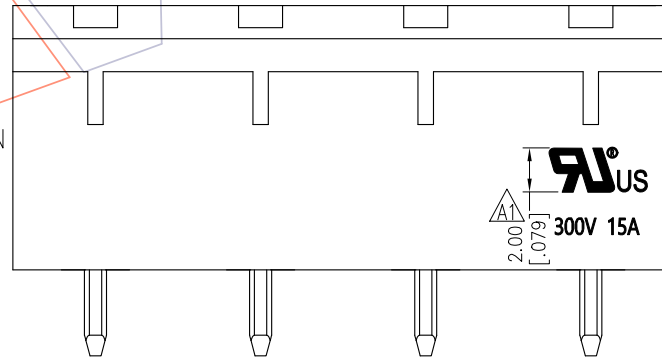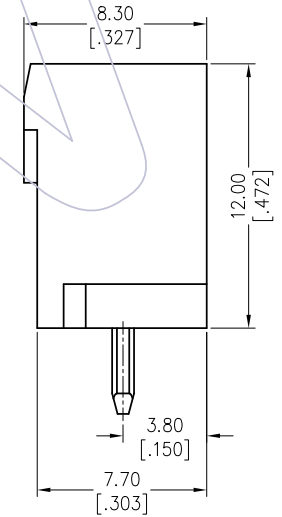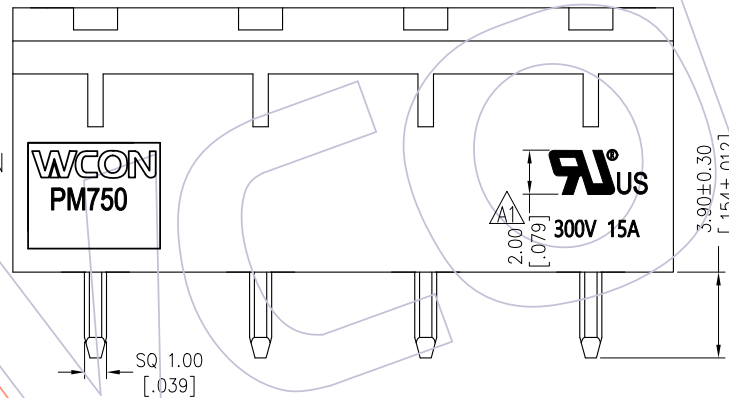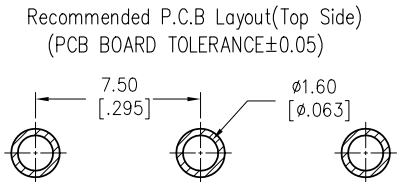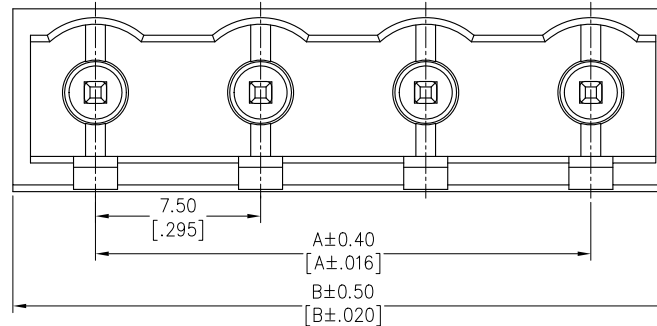

				OPERATION		DRAW XSR	DATE 2021/02/23	SCALE	FIT	PART NO. PM750-1SXXASM1(N) 	 Http: www.wcon.com	
				X.X	±0.40			UNIT	mm inch			
A1	2021/02/23	ADD UL Logo;ADD W/O WCON SPEC&P/N	XSR	X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE: 7.50mm Pitch Male Pluggable Terminal Blocks	WCON-Dongguan	
A0	2013/11/06	NEW	—	X.XXX	±0.15			SHEET	1/1		Tel: +86 769 85358920	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3°	APPROVE	DATE	PROJ.		Customer NO.	WCON-Kunshan	
				DIM	TOL						Tel: +86 512 57468408	
											Fax: +86 512 57468468	
											E-mail: sales@wcon.com	
											E-mail: salesks@wcon.com	

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com